


RoHS COMPLIANT

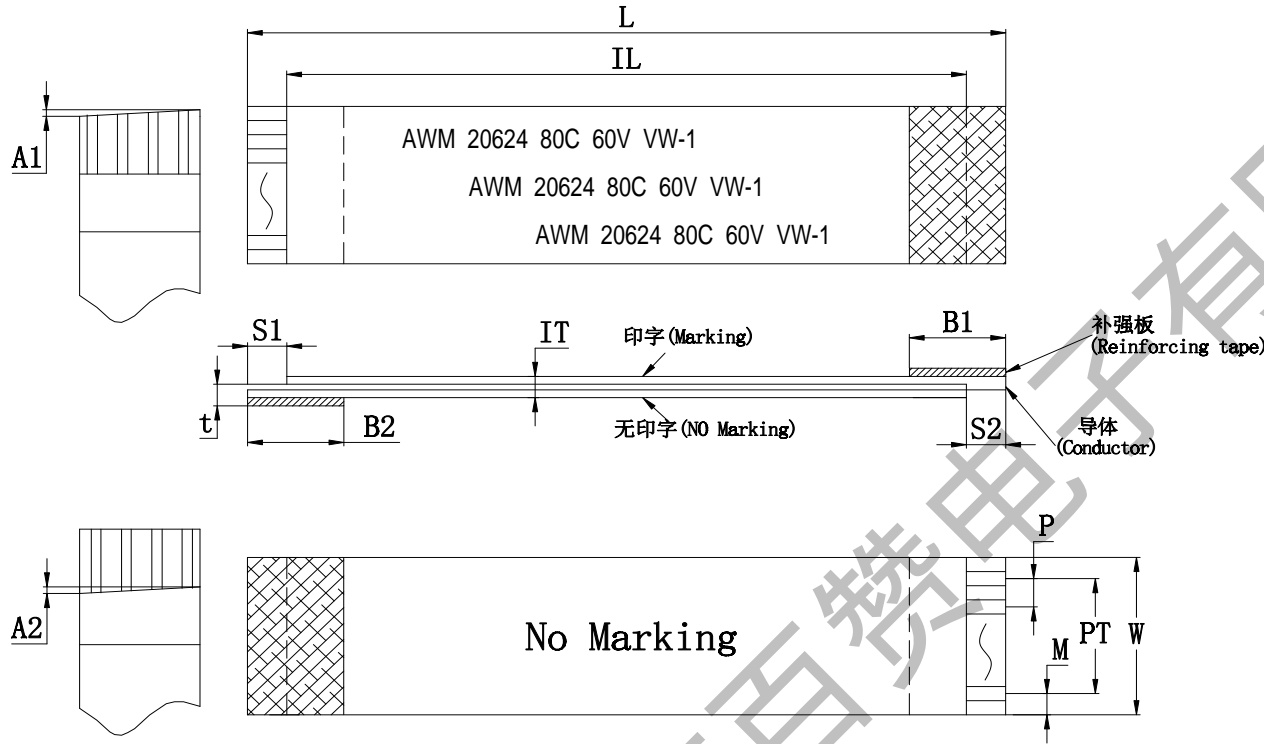

规格	FFC 0.5 14*90 3/3 4/4 反向		
组成部份	导体(Conductor)	镀锡Tin plating	0.035*0.3
	绝缘胶(Insulation)	无印字(NO Marking)	43*90
		印字(Marking)	43*90
蓝色补强板(Blue Reinforcing tape)	225*8		
印字	AWM 20624 80C 60V VW-1		
代码 Code	项目 Item	尺寸 Dimension	公差 Tolerance
N	导体屏数 (Number of Conductors)	14	
P	导体间距 (Pitch)	0.5	±0.08
PT	总间距 (Total Pitch) (N-1)*P	6.5	±0.08
L	产品总长度 (Total Length)	90	±2.0
IL	线身长度 (Insulation Length) L-(S1+S2)	84	±2.0
M	边距 (Margin Width)	0.5	±0.08
W	总宽度 (Total Width) (N+1)*P	7.5	±0.08
S1	线口长度 (Strip Length)	3	±0.5
S2	线口长度 (Strip Length)	3	±0.5
B1	补强板长度 (Reinforcing Length)	4	±1.0
B2	补强板长度 (Reinforcing Length)	4	±1.0
A1	线口倾斜度 (Slanting)	≤0.3	
A2	冲孔倾斜度 (Slanting)	≤0.3	
t	线口厚度 (Terminal Thickness)	0.3	±0.02
T	线身厚度 (Reinforcing Length)	0.12	±0.02

BZDZ

东莞市百赞电子有限公司

DIM	TOL	DEC	TOL	DRWN:	PART NO.:
X.	±0.50	X.°	±2°	CHKD:	TITLE:
X.X	±0.35	X.X°	±2°	APPD:	FFC 0.5 14*90 3/3 4/4 反向
X.XX	±0.20	X.XX°	±1	SHEET:	DRAWING NO.:
X.XXX	±0.10	X.XXX°	±1	1/1	UNIT: mm
				SCALE: N/A	SIZE: A4
				REV: A	